




MEASUREMENT SOLUTION PROVIDER

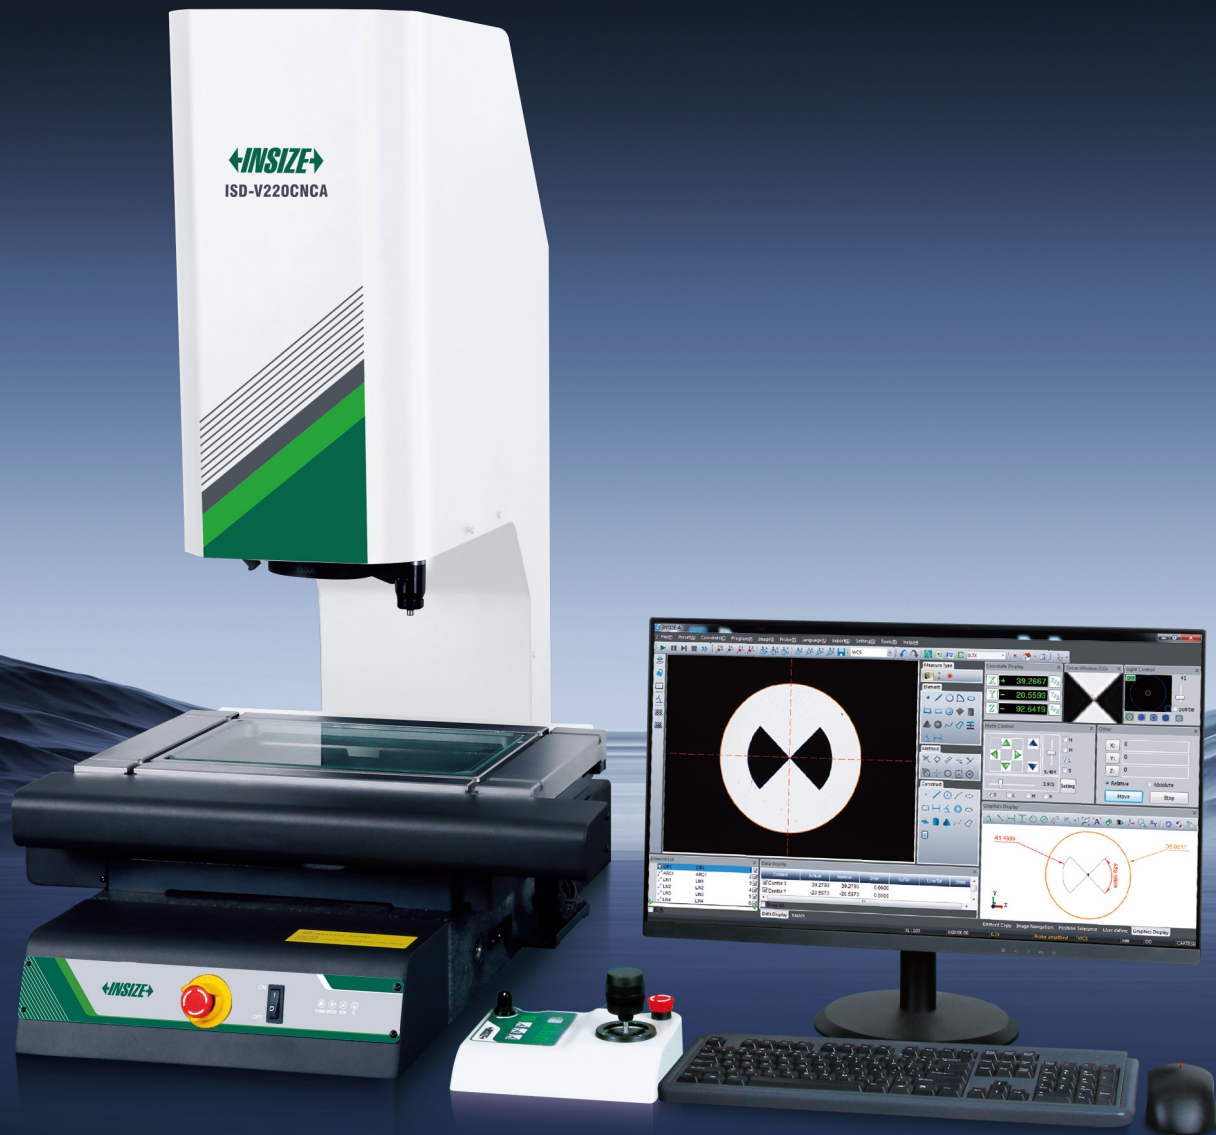

# ISD-V SERIES VISION MEASURING SYSTEMS

CATALOGUE NO. ISD-E31



## 01

## Product Overview and Advantages


**Non-contact measurement:** Prevents scratches or deformation to workpieces (especially fragile or precision components), safeguarding their integrity.

**Visual operation:** Displays real-time workpiece images on screen, with measurement points and dimensional annotations clearly visible, reducing manual judgment errors.

**Wide applicability:** Measures various parameters including planar dimensions, contours, hole positions, and angles, suitable for electronics, mold making, hardware, and other industries.

INSIZE  
ISD-V220ZA


Workpiece Measurement

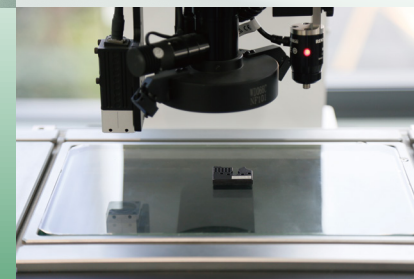

Surface Illumination




Fixture Operation Page

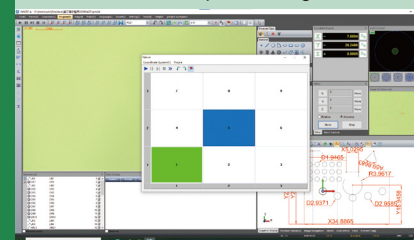

Intelligent edge detection, auto-focus, auto-measurement, auto-scanning, auto-calibration



Featuring segmented control for surface illumination, contour illumination and coaxial illumination



X, Y, Z three-axis servo control



SPC Data Analysis and Processing




Bulk jigs




## ► Measurement domain



PCB

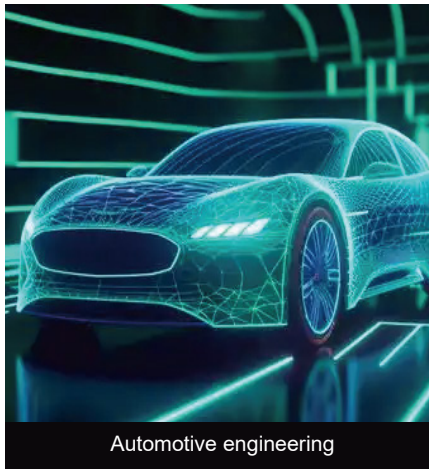

Automotive engineering

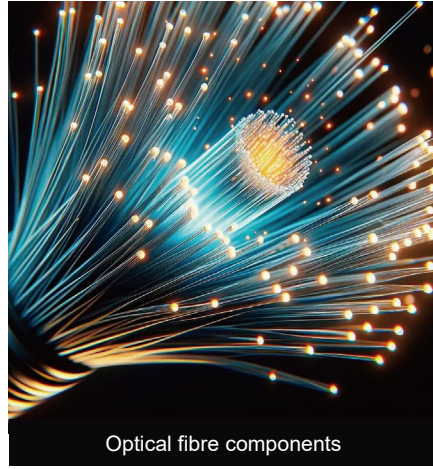

Optical fibre components



Mobile phone





Aerospace



Hardware &amp; Plastics

Beyond this, it finds extensive application across various sectors including precision electronics, wafer technology, cutting tools, precision components, springs, stamped parts, connectors, moulds, military equipment, 2D reverse engineering, drafting, engineering development, conductive rubber, powder metallurgy, screws, watch components, the pharmaceutical industry, higher education institutions, and research institutes.


## ► Application scenarios

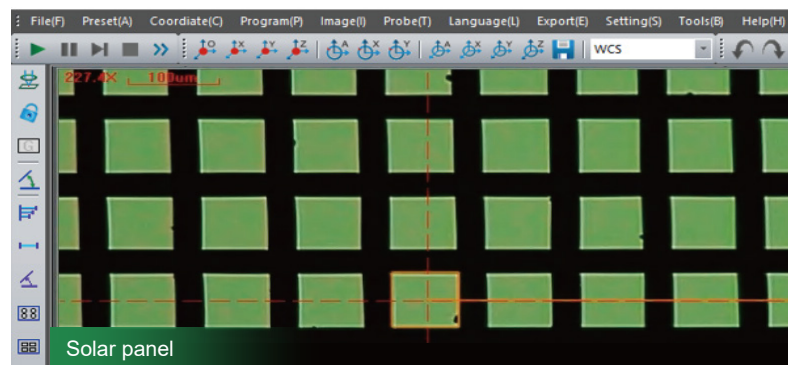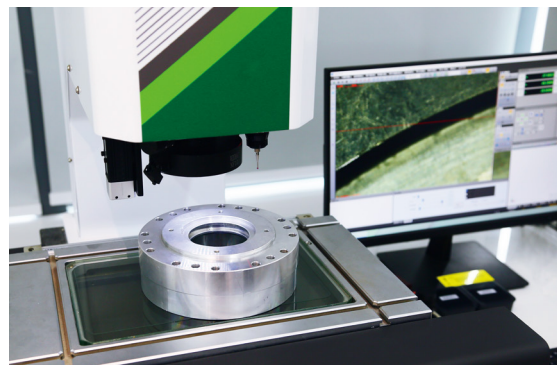

Solar panel

## ► Compared with traditional tools

### Vision measurement system automatic edge detection

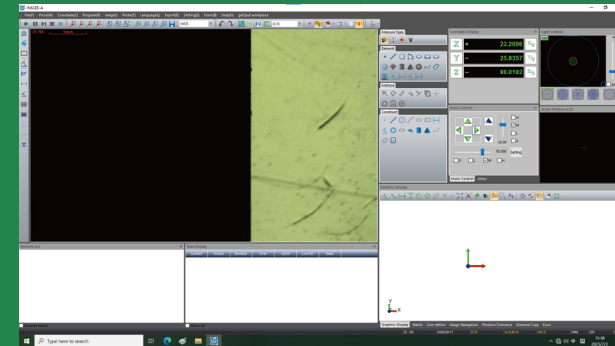

👍 **Automatic**


👍 **Precision**

👍 **Quickly**

👍 **Extensively**

CNC vision measuring systems replace manual measurement with automated instrumentation, delivering higher precision, reduced processing time, and the ability to handle more complex workpieces, thereby significantly boosting productivity.

### Traditional measurement

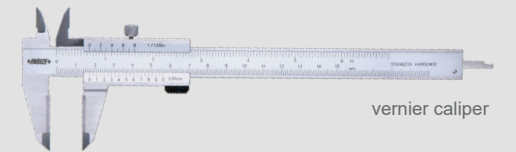

vernier caliper



micrometer



😞 **Manual**

😞 **Poor accuracy**

😞 **Slow**

😞 **Single**



## 02

Detailed  
Functionality


ISD-V series vision measuring systems, equipped with a colour giga-bit network camera, X/Y/Z-axis resolution 0.5µm.

Compatible with Windows 10/11 and multiple operating systems, offering broad applicability and strong versatility. Its exceptionally high resolution significantly measurement accuracy.


Its outstanding performance enables extensive application across diverse sectors including precision electronics, semiconductor technology, cutting tools, plastics, precision components, springs, stamped parts, connectors, moulds, military applications, 2D digitising, drafting, engineering development, hardware and plastics, PCB, conductive rubber, powder metallurgy, screws, watch components, mobile phones, pharmaceuticals, fibre optics, automotive engineering, aerospace, higher education institutions, and research institutes.



## ► Interface feature overview

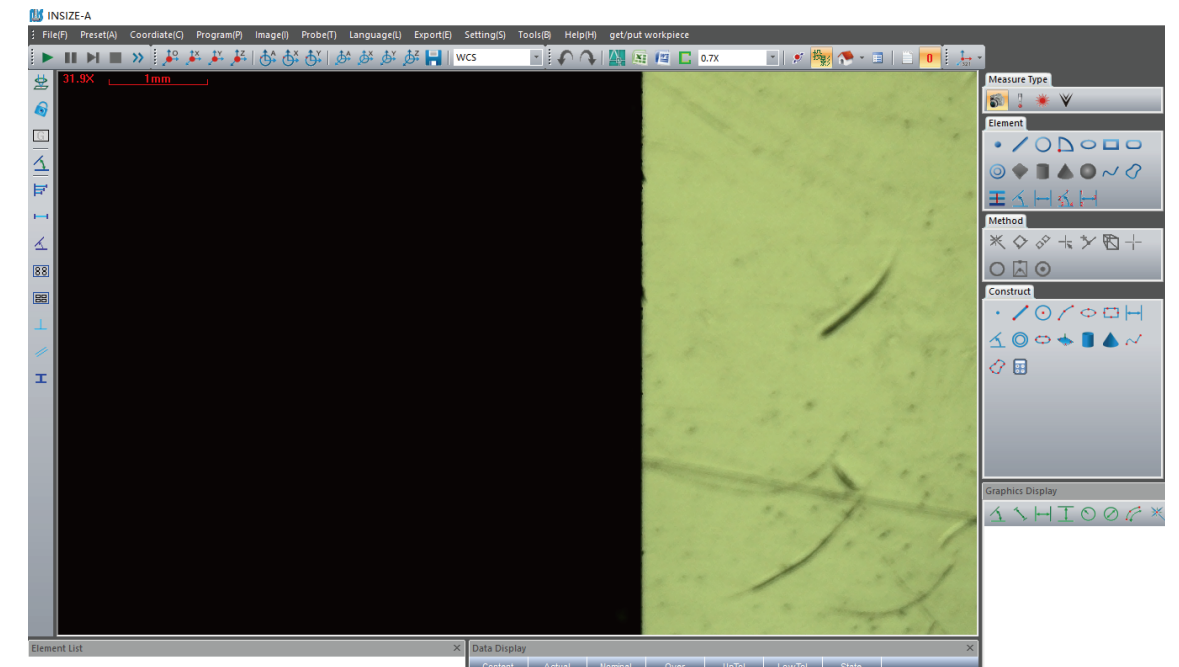


Top left: Image display on the left, tool selection on the right

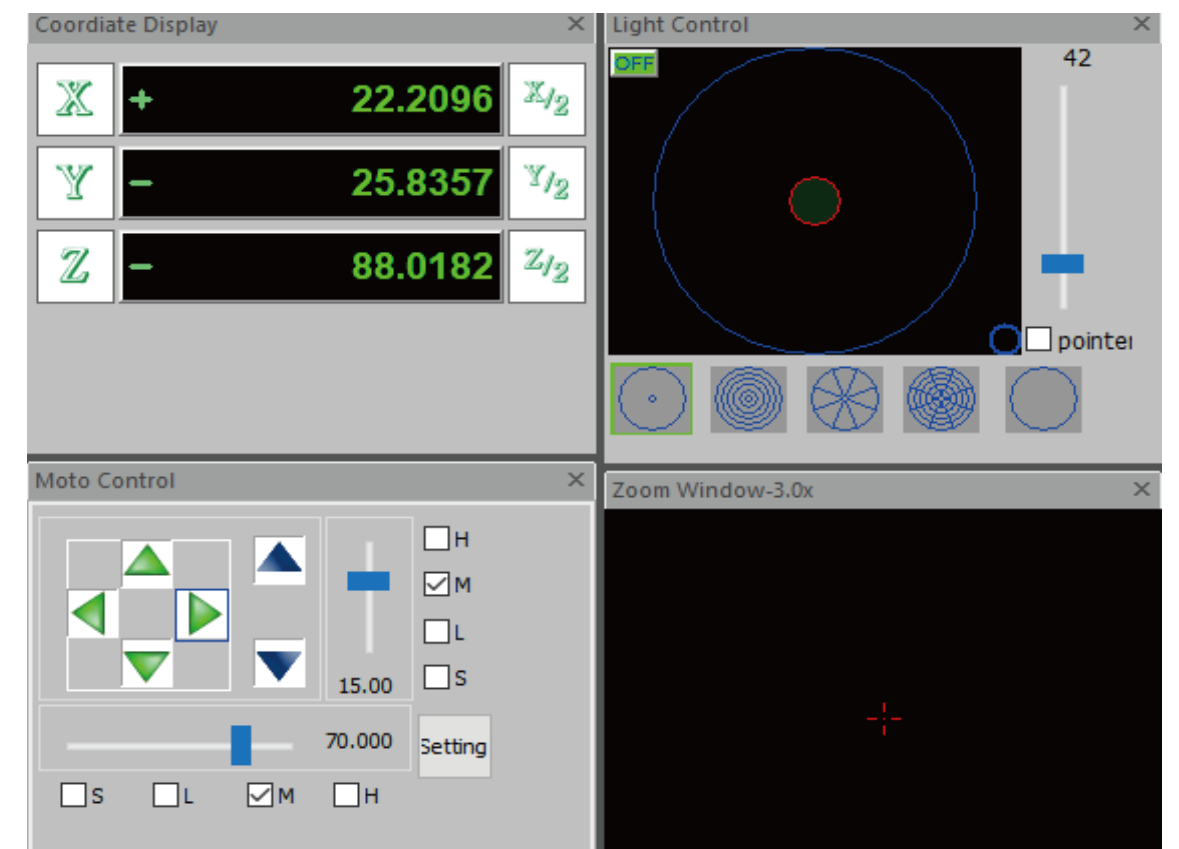

Top right: The left side of the diagram shows the motion control area and coordinate display, while the right side displays the lighting control area.



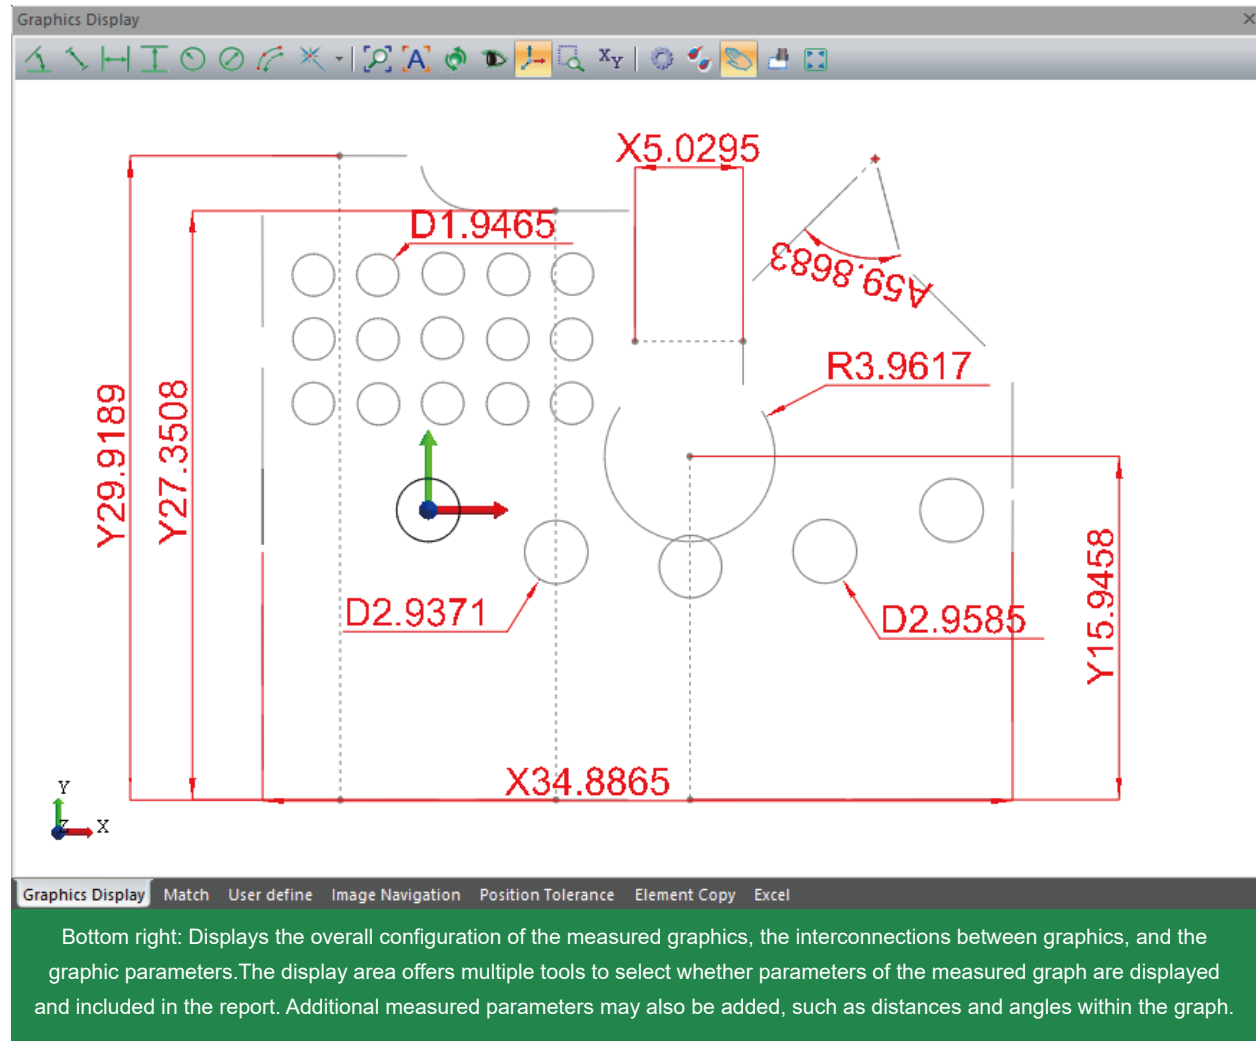

Content	Actual	Nominal	Over	UpTol	LowTol	State
<input checked="" type="checkbox"/> Diameter	2.9358	2.9358	0.0000			



☐ Show All

Data Display Find Parameter

Bottom left: Parameters of the selected element

### ► Vision measuring systems data export function

The vision measuring system software boasts extensive functionality and the capability to export data. Upon completion of measurements, results may be exported in multiple formats including Word and Excel. The exported report displays the pattern and data of the tested workpiece.

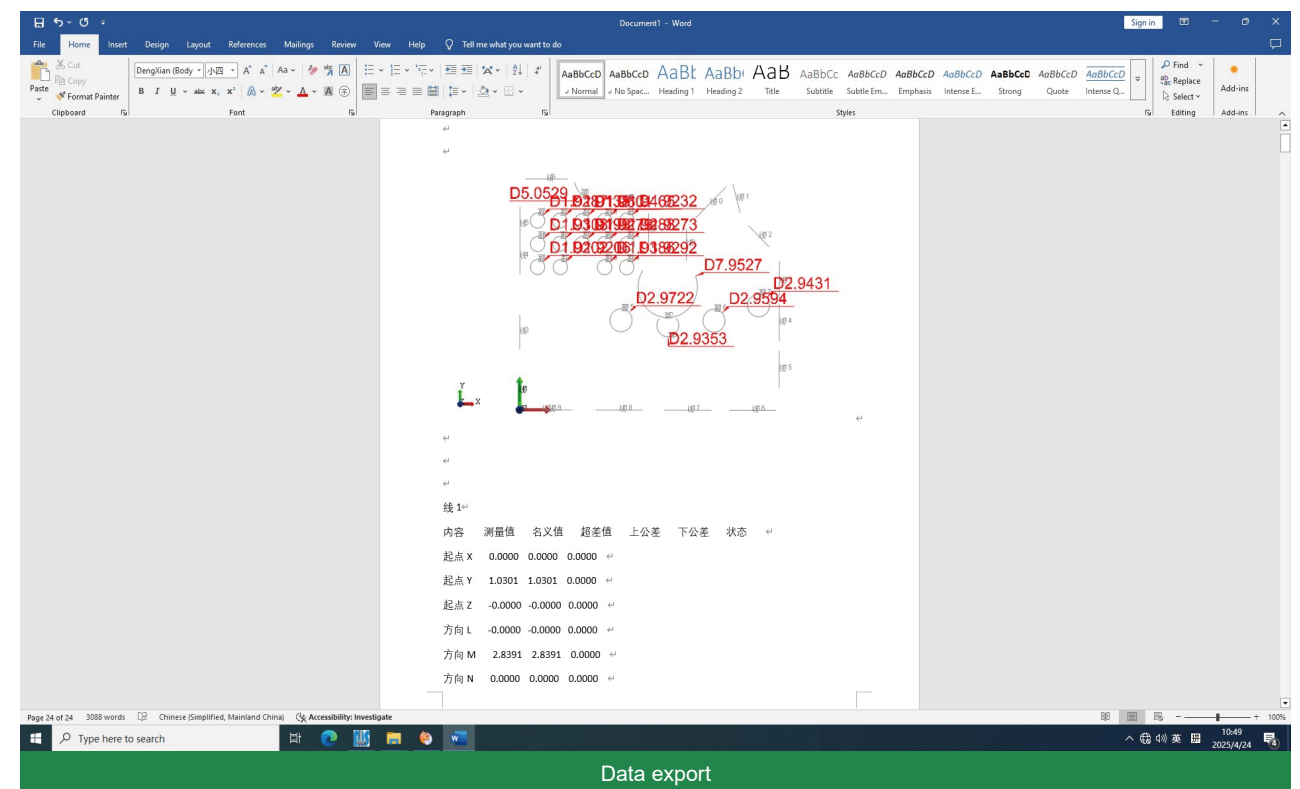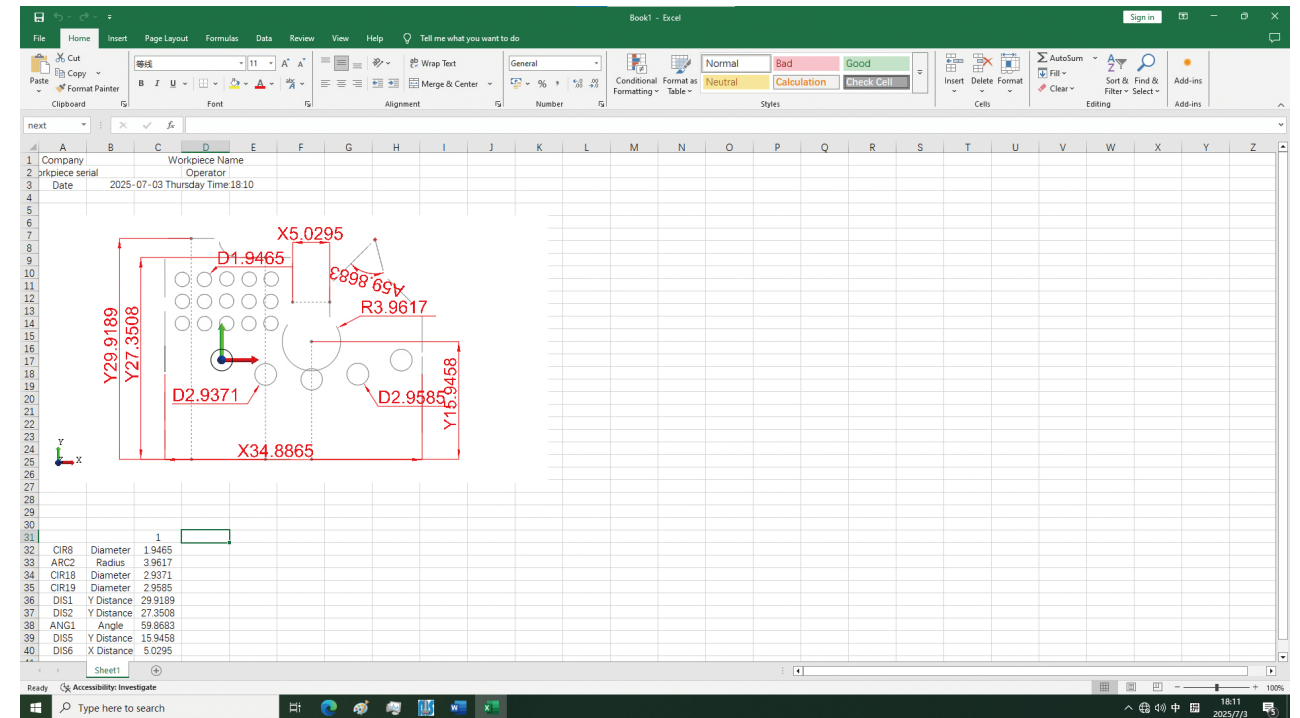



## 03

## I Operating procedure

step 1

## Place workpiece



Selecting the appropriate  
fixing device

step 2

Focus and illumination  
adjustment

Adjust the light source  
and focus to ensure the  
image is clear.

step 3

## Measurement



Edit the measurement  
programme and run

step 4

## Editorial Report



Select file format,  
select item




## 04

## I Brand advantages

## ► Software advantages

The software is straightforward with clear functionality, and its simple programming capabilities require minimal learning effort—a significant advantage of our brand. Vision measuring systems are broadly similar, enabling measurement of flat surfaces and simple height differentials. The software is a three-in-one solution, offering user-friendly operation.

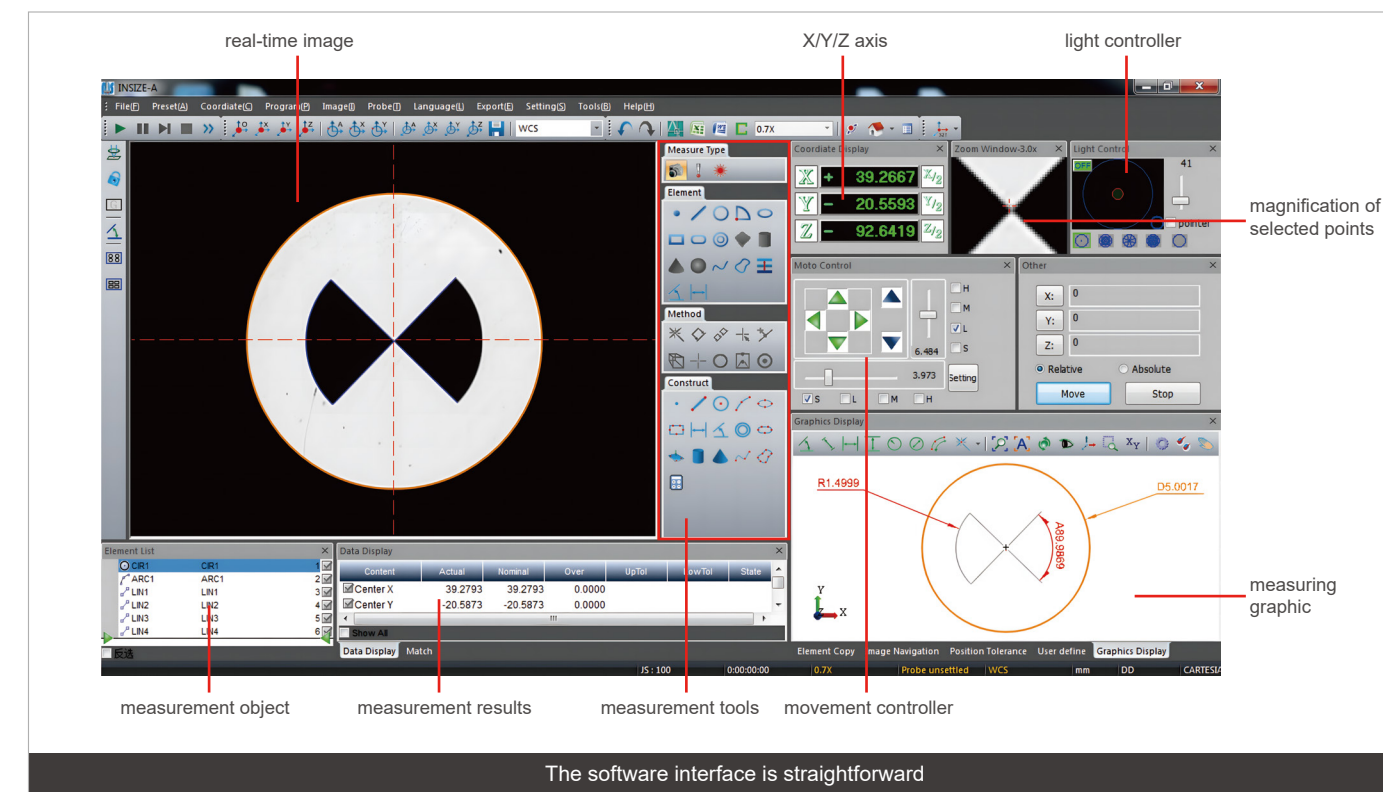

## ► Service quality advantage

The quality of our after-sales fault diagnosis and repair services represents a key strength of our company, encompassing professional factory commissioning.





► Extensive range of optional extras

It can perform composite measurements along the X, Y, and Z axes. Beyond the imaging measurement capabilities, styli and laser probe can broaden vision measuring systems application scope, compensating for the lack of height measurement functionality. Flatness may be measured.




Name	CNC vision measuring system
0.5X auxiliary objective	code: <b>ISD-V-OB05X</b> working distance: 175mm magnification: 16.5~104.3X (with manual zoom lens, on 24" monitor), 16.0~94.4X (with motorized zoom lens, on 24" monitor)
2X auxiliary objective	code: <b>ISD-V-OB2X</b> working distance: 36mm magnification: 66~417.2X (with manual zoom lens, on 24" monitor), 63.8~377.4X (with motorized zoom lens, on 24" monitor)
Standard probe set (RENISHAW)	code: <b>ISD-V-PROBE</b> , includes Ø2mm and Ø3mm styli, Ø25mm calibration ball
Basic probe set	code: <b>ISD-V-PROBE1</b> , includes Ø1mm, Ø2mm, Ø3mm styli, Ø25mm calibration ball
Laser probe	code: <b>ISD-V-LASER</b>
Office software	code: <b>7313-OFFICE</b>

Name	Manual vision measuring system
0.5X auxiliary objective	code: <b>ISD-V-OB05X</b> working distance: 175mm magnification: 14.5~92X (on 21.5" monitor)
2X auxiliary objective	code: <b>ISD-V-OB2X</b> working distance: 36mm magnification: 58~368X (on 21.5" monitor)
Standard probe set (RENISHAW)	code: <b>ISD-V-PROBE</b> , includes Ø2mm and Ø3mm styli, Ø25mm calibration ball
Basic probe set	code: <b>ISD-V-PROBE1</b> , includes Ø1mm, Ø2mm, Ø3mm styli, Ø25mm calibration ball
Vision measuring system with coaxial light lens (with computer)	code: <b>ISD-V150ACL, ISD-V250ACL, ISD-V300ACL, ISD-V400ACL</b> code: <b>ISD-V150HCL, ISD-V250HCL, ISD-V300HCL, ISD-V400HCL</b>
Office software	code: <b>7313-OFFICE</b>

► CAD import

DXF files can be imported into the software, which intelligently generates testable features, inspection items and sets tolerances, thereby facilitating the editing of measurement programmes.

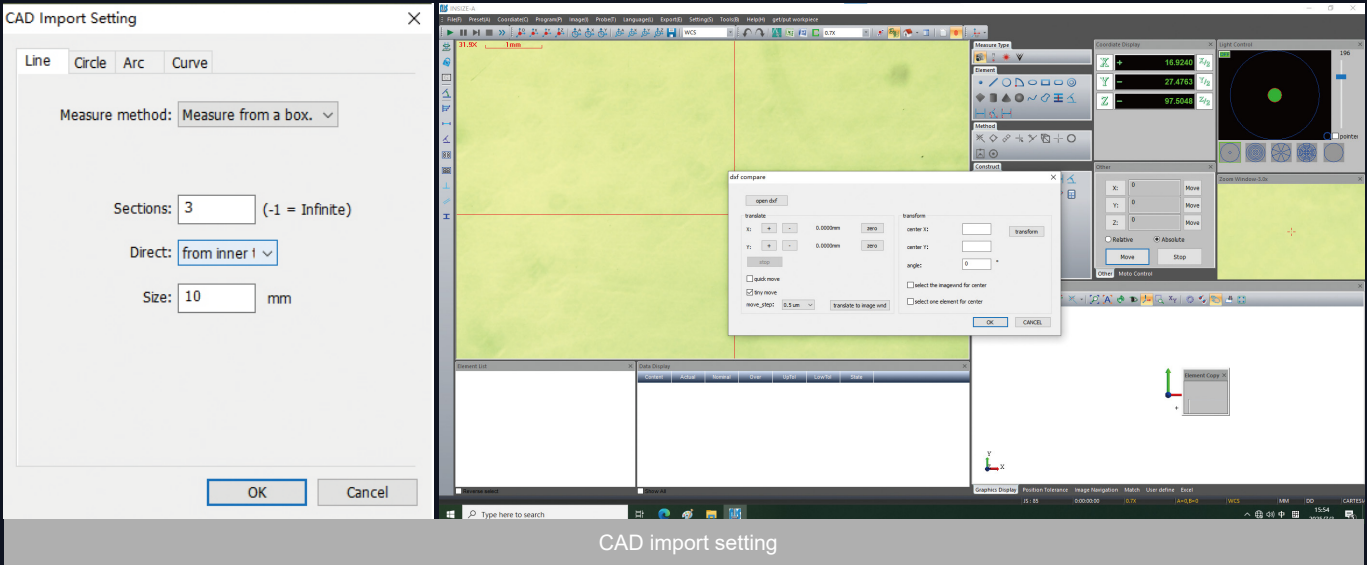

05  
I Specification

CNC vision measuring systems							
Code	motorized zoom lens	ISD-V220ZA	ISD-V220ZHN	ISD-V270ZA	ISD-V270ZHN	ISD-V370ZA	ISD-V370ZHN
	manual zoom lens	ISD-V220CNCA	ISD-V220HN	ISD-V270CNCA	ISD-V270HN	ISD-V370CNCA	ISD-V370HN
Measuring range (X×Y×Z)		220x120x150mm	220x120x300mm	270x170x150mm	270x170x300mm	370x270x150mm	370x270x300mm
Stage size		450x280mm	450x280mm	500x330mm	500x330mm	606x466mm	606x466mm
Glass stage size		306x196mm	306x196mm	350x250mm	350x250mm	450x350mm	450x350mm
Resolution of X/Y/Z axis		0.5µm					
Accuracy of X/Y axis		≤(2.5+L/100)µm (L is the measuring length in mm)					≤(3.5+L/100)µm (L is the measuring length in mm)
Repeatability of X/Y axis		2µm					
Objective		0.7X~4.5X (zoom)					
Working distance		92mm					
View field (diagonal length)		1.5~10.8mm					
Magnification		33.0X~208.6X(with manual zoom lens, on 24" monitor)					
		31.9X~188.7X(with motorized zoom lens, on 24" monitor)					
Camera		giga-bit network camera					
Illumination	surface	coaxial light, programmable segmented ring light					
	contour	adjustable LED light					
Max. height of workpiece		150mm	300mm	150mm	300mm	150mm	300mm
Max. weight of workpiece		30kg					
Operation system		Windows 10/11					
Drive method		automatic					
Power supply		220V, 50/60Hz					
Dimension (L×W×H)		760x600x900mm	760x600x1050mm	760x600x900mm	760x600x1050mm	970x670x940mm	970x670x1090mm
Net weight		146kg	156kg	168kg	178kg	266kg	276kg





Manual vision measuring systems				
Code	ISD-V150A	ISD-V250A	ISD-V300A	ISD-V400A
Measuring range (X×Y×Z)	150x100x150mm	250x150x150mm	300x200x150mm	400x300x150mm
Stage size	354x228mm	450x280mm	500x330mm	606x466mm
Glass stage size	210x160mm	306x196mm	350x250mm	450x350mm
Resolution of X/Y/Z axis	0.5μm			
Accuracy of X/Y axis	≤(2.5+L/100)μm (L is the measuring length in mm)			
Repeatability of X/Y axis	2μm			
Objective	0.7X~4.5X (zoom)			
Working distance	92mm			
Magnification	29X~184X (on 21.5" monitor)			
Camera	1/3" color CCD, 0.3M pixel			
Illumination	surface and contour: adjustable brightness LED light			
Max. height of workpiece	150mm			
Max. weight of workpiece	20kg			
Operation system	Windows 10/11			
Drive method	manual			
Power supply	110/220V, 50/60Hz			
Dimension (L×W×H)	560x540x850mm	760x600x900mm	760x600x900mm	970x670x940mm
Net weight	100kg	120kg	140kg	240kg



Manual vision measuring systems				
Code	ISD-V150H	ISD-V250H	ISD-V300H	ISD-V400H
Measuring range (X×Y×Z)	150x100x300mm	250x150x300mm	300x200x300mm	400x300x300mm
Stage size	354x228mm	450x280mm	500x330mm	606x466mm
Glass stage size	210x160mm	306x196mm	350x250mm	450x350mm
Resolution of X/Y/Z axis	0.5μm			
Accuracy of X/Y axis	≤(2.5+L/100)μm (L is the measuring length in mm)			
Repeatability of X/Y axis	2μm			
Objective	0.7X~4.5X (zoom)			
Working distance	92mm			
Magnification	29X~184X (on 21.5" monitor)			
Camera	1/3" color CCD, 0.3M pixel			
Illumination	surface and contour: adjustable brightness LED light			
Max. height of workpiece	300mm			
Max. weight of workpiece	20kg			
Operation system	Windows 10/11			
Drive method	manual			
Power supply	110/220V, 50/60Hz			
Dimension (L×W×H)	560x540x1000mm	760x600x1050mm	760x600x1050mm	970x670x1090mm
Net weight	110kg	130kg	150kg	250kg





MEASUREMENT SOLUTION PROVIDER

[www.insize.com](http://www.insize.com)



+86-512-68099993

[sales@insize.com](mailto:sales@insize.com)

80 Xiangyang Road, Suzhou New District, 215009 China